




BEARING DRIVESHAFT, INC.

NTN 562956M thrust ball bearings

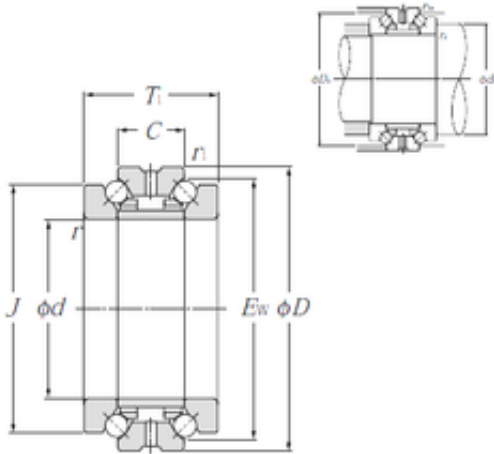

Bearing No. 562956M

| | |
|-------------------------------|-----------|
| Bore Diameter | 289 mm |
| Outer Diameter | 356 mm |
| d | 289 mm |
| D | 380 mm |
| Ew | 356 mm |
| T1 | 120 mm |
| C | 60 mm |
| ra1 max. | 1 mm |
| r min. | 2,1 mm |
| r1 min. | 1,1 mm |
| J | 348 mm |
| da min. | 319 mm |
| Da max. | 370 mm |
| ra max. | 2 mm |
| Weight | 31,5 Kg |
| Basic dynamic load rating (C) | 265 kN |
| Basic static load rating (C0) | 1 190 kN |
| (Grease) Lubrication Speed | 980 r/min |

562956M Bearing 2D drawings and 3D CAD models