




BEARING DRIVESHAFT, INC.

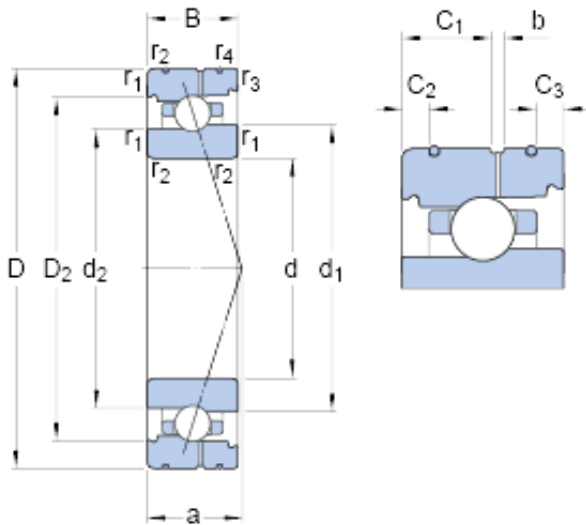

40 mm x 68 mm x 15 mm SKF 7008 ACB/P4AL
angular contact ball bearings

Bearing No. 7008 ACB/P4AL

7008 ACB/P4AL Bearing 2D drawings and 3D CAD models

Size	68x40x15 mm
Bore Diameter	68 mm
Outer Diameter	40 mm
Width	15 mm
d	40 mm
D	68 mm
B	15 mm
d ₁	50.95 mm
d ₂	49.87 mm
D ₂	58.88 mm
b	1.5 mm
C ₁	7.8 mm
C ₂	3.6 mm
C ₃	2.6 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.6 mm
a	20.2 mm
d _a - min.	44.6 mm
d _b - min.	44.6 mm
D _a - max.	63.4 mm
D _b - max.	64.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
d _n	51.6 mm



BEARING DRIVESHAFT, INC.

Basic dynamic load rating - C	6.9 kN
Basic static load rating - C ₀	5.3 kN
Fatigue load limit - P _u	0.224 kN
Limiting speed for grease lubrication	26000 r/min
Limiting speed for oil lubrication	40000 mm/min
Ball - D _w	4.762 mm
Ball - z	26
G _{ref}	2.22 cm ³
Calculation factor - e	0.68
Calculation factor - Y ₂	0.87
Calculation factor - Y ₀	0.38
Calculation factor - X ₂	0.41
Calculation factor - Y ₁	0.92
Calculation factor - Y ₂	1.41
Calculation factor - Y ₀	0.76
Calculation factor - X ₂	0.67
Preload class A - G _A	41 N
Preload class B - G _B	82 N
Preload class C - G _C	245 N
Calculation factor - f	1.04
Calculation factor - f ₁	0.99
Calculation factor - f _{2A}	1
Calculation factor - f _{2B}	1.01
Calculation factor - f _{2C}	1.04
Calculation factor - f _{HC}	1
Preload class A	71 N/micron
Preload class B	92 N/micron



BEARING DRIVESHAFT, INC.

Preload class C	138 N/micron
d_1	50.95 mm
d_2	49.87 mm
D_2	58.88 mm
C_1	7.8 mm
C_2	3.6 mm
C_3	2.6 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	44.6 mm
d_b min.	44.6 mm
D_a max.	63.4 mm
D_b max.	64.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
d_n	51.6 mm
Basic dynamic load rating C	9.36 kN
Basic static load rating C_0	8.65 kN
Fatigue load limit P_u	0.224 kN
Attainable speed for grease lubrication	26000 r/min
Attainable speed for oil-air lubrication	40000 r/min
Ball diameter D_w	4.762 mm
Number of balls z	26
Reference grease quantity G_{ref}	2.22 cm ³
Preload class A G_A	41 N
Static axial stiffness, preload class A	71 N/ μ m
Preload class B G_B	82 N
Static axial stiffness, preload class B	92 N/ μ m
Preload class C G_C	245 N



BEARING DRIVESHAFT, INC.

Static axial stiffness, preload class C	138 N/ μ m
Calculation factor f	1.04
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.01
Calculation factor f_{2C}	1.04
Calculation factor f_{HC}	1
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.21 kg