




BEARING DRIVESHAFT, INC.

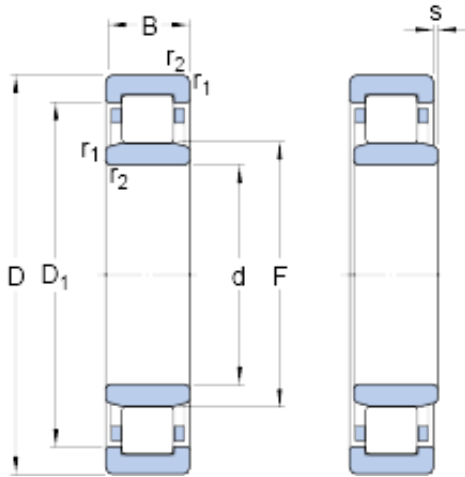

600 mm x 800 mm x 90 mm SKF NU 19/600
ECMA/HA1 thrust ball bearings

Bearing No. NU 19/600 ECMA/HA1

NU 19/600 ECMA/HA1 Bearing 2D drawings and 3D
CAD models

Size	800x600x90 mm
Bore Diameter	800 mm
Outer Diameter	600 mm
Width	90 mm
d	600 mm
D	800 mm
B	90 mm
D ₁	740 mm
F	649 mm
r _{1,2} - min.	5 mm
s	4.5 mm
d _a - min.	618 mm
d _a - max.	642 mm
d _b - min.	655 mm
D _a - max.	782 mm
r _a - max.	4 mm
Basic dynamic load rating - C	1900 kN
Basic static load rating - C ₀	3800 kN
Fatigue load limit - P _u	270 kN
Reference speed	750 r/min
Limiting speed	950 r/min
Calculation factor - k _r	0.07
D ₁	740 mm
r _{1,2} min.	5 mm



BEARING DRIVESHAFT, INC.

s max.	4.5 mm
d_a min.	618 mm
d_a max.	642 mm
d_b min.	655 mm
D_a max.	782 mm
r_a max.	4 mm
Basic dynamic load rating C	1900 kN
Basic static load rating C_0	3800 kN
Fatigue load limit P_u	270 kN
Calculation factor k_r	0.07
Limiting value e	0.2
Axial load factor Y	0
Mass bearing	130 kg