




BEARING DRIVESHAFT, INC.

25 mm x 52 mm x 20,6 mm NTN 5205SCZZ
angular contact ball bearings

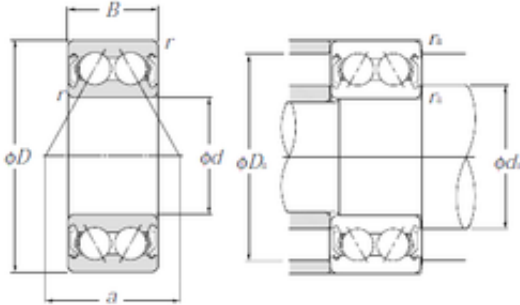

5205SCZZ Bearing 2D drawings and 3D CAD models

Bearing No. 5205SCZZ

Size	25x52x20.6 mm
Bore Diameter	25 mm
Outer Diameter	52 mm
Width	20,6 mm
d	25 mm
D	52 mm
B	20,6 mm
C	20,6 mm
a	25,4 mm
r min.	1 mm
da min.	31 mm
da max	32 mm
Da max.	46 mm
ra max.	1 mm
Basic dynamic load rating (C)	16,9 kN
Basic static load rating (C0)	12,3 kN
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359536416
Product Group	B00152
Enclosure	2 Metal Shields



BEARING DRIVESHAFT, INC.

Flush Ground	No
Rolling Element	Ball Bearing
Number of Rows of Balls	Double Row
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Steel
Contact Angle	25 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Inch - Metric	Metric
Long Description	25MM Bore; 52MM Outside Diameter; 20.6MM Width; 2 Metal Shields; No Flush Ground; Ball Bearing; Double Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 25 Degree; 1
Other Features	Shell Alvania 2 Prelubricated
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.ntnamerica.com
Bore	0.984 Inch 25 Millimeter
Outside Diameter	2.047 Inch 52 Millimeter
Width	0.811 Inch 20.6 Millimeter