




BEARING DRIVESHAFT, INC.

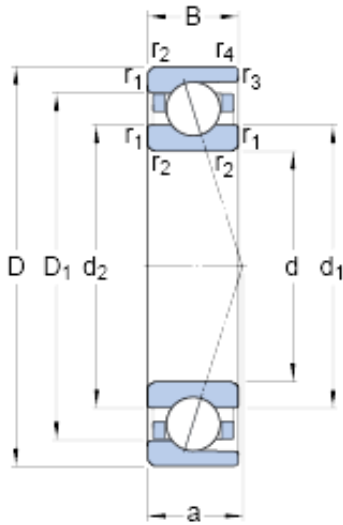

7217 ACD/HCP4A Bearing 2D drawings and 3D CAD models

85 mm x 150 mm x 28 mm SKF 7217 ACD/HCP4A angular contact ball bearings

Bearing No. 7217 ACD/HCP4A

Size	150x85x28 mm
Bore Diameter	150 mm
Outer Diameter	85 mm
Width	28 mm
d	85 mm
D	150 mm
B	28 mm
d ₁	106.5 mm
d ₂	106.5 mm
D ₁	129.5 mm
r _{1,2} - min.	2 mm
r _{3,4} - min.	1 mm
a	41.7 mm
d _a - min.	96 mm
d _b - min.	96 mm
D _a - max.	139 mm
D _b - max.	144.4 mm
r _a - max.	2 mm
r _b - max.	1 mm
d _n	111.5 mm
Basic dynamic load rating - C	95.6 kN
Basic static load rating - C ₀	85 kN
Fatigue load limit - P _u	3.4 kN
Limiting speed for grease	9500 r/min



BEARING DRIVESHAFT, INC.

Lubrication	
Limiting speed for oil lubrication	16000 mm/min
Ball - D_w	19.05 mm
Ball - z	17
G_{ref}	21.822 cm ³
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	600 N
Preload class B - G_B	1200 N
Preload class C - G_C	2400 N
Preload class D - G_D	4800 N
Calculation factor - f	1.08
Calculation factor - f_1	0.99
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.01
Calculation factor - f_{2C}	1.03
Calculation factor - f_{2D}	1.06
Calculation factor - f_{HC}	1.01
Preload class A	278 N/micron
Preload class B	361 N/micron
Preload class C	477 N/micron
Preload class D	642 N/micron



BEARING DRIVESHAFT, INC.

d_1	106.5 mm
d_2	106.5 mm
D_1	129.5 mm
$r_{1,2}$ min.	2 mm
$r_{3,4}$ min.	1 mm
d_a min.	96 mm
d_b min.	96 mm
D_a max.	139 mm
D_b max.	144.4 mm
r_a max.	2 mm
r_b max.	1 mm
d_n	111.5 mm
Basic dynamic load rating C	95.6 kN
Basic static load rating C_0	85 kN
Fatigue load limit P_u	3.35 kN
Attainable speed for grease lubrication	9500 r/min
Attainable speed for oil-air lubrication	16000 r/min
Ball diameter D_w	19.05 mm
Number of balls z	17
Reference grease quantity G_{ref}	21.822 cm ³
Preload class A G_A	600 N
Static axial stiffness, preload class A	278 N/ μ m
Preload class B G_B	1200 N
Static axial stiffness, preload class B	361 N/ μ m
Preload class C G_C	2400 N
Static axial stiffness, preload class C	477 N/ μ m
Preload class D G_D	4800 N
Static axial stiffness, preload class D	642 N/ μ m



BEARING DRIVESHAFT, INC.

class D	
Calculation factor f	1.08
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.01
Calculation factor f_{2C}	1.03
Calculation factor f_{2D}	1.06
Calculation factor f_{HC}	1.01
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	1.57 kg